Virginia Phase II (Small) Municipal Separate Storm Sewer Systems (MS4) General Permit No. VAR040127

## Arlington Public Schools Small MS4 Program Plan



2023-2028 Permit Cycle Updated May 2024

## Contents

Introduction	2
I. Municipal Separate Storm Sewer System Management Program – Minimum Control Measures (MCM)	
A. Public Education and Outreach on Stormwater Impacts (MCM 1)	3
B. Public Involvement/Participation (MCM 2)	6
C. Illicit Discharge Detection and Elimination (MCM 3)	8
D. Construction Site Stormwater Runoff Control (MCM 4)	10
E. Post-Construction Stormwater Management: Operator-Owned Stormwater Management Inspection Procedures (MCM 5)	13
F. Pollution Prevention/Good Housekeeping For Municipal Operations (MCM 6)	16
II. TMDL Special Conditions	22
A. Chesapeake Bay TMDL Special Condition	22
B. Local TMDL Special Condition	23

Appendix A – List of Responsible Department Names and Acronyms

Appendix B – APS Physical Interconnection Notification Letters

Appendix C – Memorandum for Agreement – Roles and Responsibilities of Arlington County and Arlington Public Schools for MS4 Permit Compliance

Appendix D – Standard Operating Procedures for Stormwater Facility Inspection and Maintenance

Appendix E – APEX Contract for Third Party Inspection, Operation, and Maintenance of APS Stormwater Management Facilities

Appendix F – Memorandum of Agreement for Chesapeake Bay Nutrient Credits

Appendix G – APS Program Plan Reference Documents

## Introduction

This Phase II (Small) Municipal Separate Storm Sewer System (MS4) Program Plan is maintained by Arlington Public Schools (APS) in full compliance with its General Virginia Pollutant Discharge Elimination System (VPDES) Permit (VAR040127) for Discharges of Stormwater, issued November 1, 2023 by the Virginia Department of Environmental Quality (DEQ).

The MS4 Program Plan requirements of the General VPDES Permit, implemented as described in this plan, have been determined to reduce the discharge of pollutants to the "maximum extent practicable" (MEP) for a Small MS4 Permit holder.

Permit Requirement	BMP Name and Description	Responsible Party	Measurable Goal & Schedule	MS4 Annual Reporting Requirements
I. Municipal Separate Stor	m Sewer System Management Program – Minimum Control Meas	,		
A. Public Education and O	utreach on Stormwater Impacts (MCM 1)			
(1) Identify high-priority stormwater issues to be communicated to the public as part of the public education and outreach program.	APS has identified its three (3) high-priority stormwater issues to be: (1) using techniques that keep water onsite and/or reduce imperviousness; (2) litter prevention; and (3) the importance of native plants for preventing soil erosion. APS feels these three high-priority areas lend themselves well to an educational environment and relate to our public audience. Our education and outreach program targets these three areas.	APS/F&O APS/Teaching and Learning	Identify high-priority stormwater issues.  Complete.	A list of the high-priority stormwater issues addressed in the public education and outreach program.
(2) Identify rationale for selection of each high-priority stormwater issue and an explanation of how each education or outreach strategy is intended to have a positive impact on stormwater discharges.	<ul> <li>Rationale for selection of high-priority stormwater issues:         <ul> <li>Using techniques that keep water onsite and/or reduce imperviousness: reduces the transport or load of stormwater pollutants discharged from the MS4. Primary education and outreach strategies include, but not limited to signage and educational events.</li> <li>Litter prevention: prevents trash, debris, and associated pollutants from being collected by stormwater and entering waterways. Primary education and outreach strategies include, but not limited to, signage and public involvement opportunities (i.e., school cleanup days).</li> <li>Importance of native plants for preventing soil erosion: helps control runoff of sediment and nutrients. Primary education and outreach strategies include, but not limited to, curriculum materials and educational events.</li> </ul> </li> <li>Education and outreach strategy impacts on stormwater discharges:         <ul> <li>Green Scene: APS-produced outreach program that highlights sustainability efforts in the school district.</li> <li>Wetlands Learning Lab: Swampy area of schoolyard converted into a Wetlands Learning Lab to promote hands-on, inquiry-based education.</li> </ul> </li> </ul>	APS/F&O APS/Teaching and Learning	Identify rationale for stormwater issues and explanation of outreach strategies.  Complete.	None.

Permit Requirement	BMP Name and Description	Responsible Party	Measurable Goal & Schedule	MS4 Annual Reporting Requirements
I. Municipal Separate Stor	m Sewer System Management Program – Minimum Control Meas			
	utreach on Stormwater Impacts (MCM 1) (continued)	<u> </u>		
	Outdoor Lab: 210-acre property in Fauquier County			
	leased by APS as an outdoor science laboratory during			
	the academic year and as an environmental education			
	camp for three weeks each summer.			
	<ul> <li>Native Habitats and Outdoor Learning Environments:</li> </ul>			
	Outdoor gardens or outdoor learning environments			
	that include native plant species as part of teaching and			
	learning curriculum at various schools.			
	<ul> <li>NOAA Chesapeake B-WET Program: Goal is to provide</li> </ul>			
	all high school biology students with a comprehensive			
	understanding of how stormwater runoff affects the			
	local watersheds and to assist students in developing			
	solutions through project-based learning.			
	Meaningful Watershed Education Experience (MWEE):			
	Integrates field work in the Chesapeake Bay watershed			
	with multidisciplinary classroom activities and			
	instruction.			
	Sustainability Liaisons: School-based stipend positions			
	that support and coordinate sustainability efforts and			
	support stormwater initiatives at schools.			
	Environmental Literacy: APS participates in Virginia			
	Department of Education environmental literacy goals			
	intended to establish a strong and targeted			
	environmental education program for K-12 students.			
	Social Media: Staff use APS-run social media accounts     to high light any important activities and tanks.			
(2) Identify the amplie	to highlight environmental activities and topics.	ADC/E 0 O	Identify no della	None
(3) Identify the public	APS has identified its public audience to be its students and	APS/F&O	Identify public	None.
audience to receive each	staff in the school district. Staff includes APS teachers,	APS/Teaching	audience.	
high-priority stormwater	administrators, trades, transportation, and custodial personnel.	and Learning	Complete	
message.			Complete.	

Permit Requirement	BMP Name and Description	Responsible	Measurable Goal &	MS4 Annual Reporting
		Party	Schedule	Requirements
I. Municipal Separate Stori	m Sewer System Management Program – Minimum Control Meas	sures (MCM)		
A. Public Education and Ou	utreach on Stormwater Impacts (MCM 1) (continued)			
(4) Develop strategies to	APS develops relevant messages and associated educational	APS/F&O	Communicate	A list of the strategies
communicate each high-	and outreach materials for the public based upon past training	APS/Teaching	messages to the	used to communicate
priority stormwater	with the Meaningful Watershed Educational Experience	and Learning	public during these	each high-priority
message. Confirm that	Program, Arlington County's Stormwater Pollution Prevention		programs, which are	stormwater issue.
two or more strategies	Plan (SWPPP) training program, and the Arlington Outdoor		conducted annually.	
identified in MS4 Permit,	Education Association's Outdoor Lab. The public education and			
Part I E 1 d, Table 1, have	outreach program includes no fewer than three strategies			
been used.	identified in Table 1 of the MS4 Permit: media materials,			
	curriculum materials, and training materials.			
	For more information, refer to the MS4 Annual Reports located			
	on our website at APS Website for Stormwater Program			
	Documents.			
(5) Identify the	All outreach programs identified above are communicated or	APS/F&O	Identify when	None.
anticipated time periods	made available to the public at least annually, with multiple	APS/Teaching	messages are	
the messages will be	programs running several times per year. For instance, Green	and Learning	available to public.	
communicated or made	Scene messages are broadcasted several times per week			
available to	throughout the year, and education initiatives (e.g., MWEE,		Complete.	
the public.	Wetlands Learning Lab) are integrated into the curriculum			
	throughout the school year.			

Permit Requirement	BMP Name and Description	Responsible	Measurable Goal &	MS4 Annual Reporting
-		Party	Schedule	Requirements
I. Municipal Separate Storm	Sewer System Management Program – Minimum Control Measur	res (MCM) (contir	nued)	
B. Public Involvement/Parti	cipation (MCM 2)			
(1) Maintain an updated Small MS4 Program Plan and post copies of the plan on permittee's webpage.	APS' updated Small MS4 Program Plan is located on our website at APS Website for Stormwater Program Documents.	APS/F&O APS/Teaching and Learning	Update the MS4 Program Plan within six months after the effective date of the 2023-2028 MS4 Permit.  Post the most up-to-date version of MS4 Program Plan on the permittee's website within 30 days of updating the MS4 Program Plan.	Include the webpage address to the permittee's MS4 Program Plan and stormwater website.
(2) Post copies of each annual report on the permittee's webpage.	APS' stormwater program documents, including MS4 Annual Reports, are located on our website at APS Website for Stormwater Program Documents.	APS/F&O	Post on webpage no later than 30 days after submittal to DEQ.  Retain the copies of annual reports online for the duration of permit coverage.	A webpage address to the permittee's MS4 program and stormwater website.

Permit Requirement	BMP Name and Description	Responsible Party	Measurable Goal & Schedule	MS4 Annual Reporting Requirements
I. Municipal Separate Stori	m Sewer System Management Program – Minimum Control Meas	, , , , , , , , , , , , , , , , , , ,		
	ticipation (MCM 2) (continued)		·	
(3) Maintain a webpage with mechanisms for the public to report potential illicit discharges, complaints, or other stormwater pollution concerns.	The APS stormwater program webpage directs members of the public to where they can report:  • potential illicit discharges, improper disposal, or spills to the MS4;  • complaints regarding land disturbing activities; or other potential stormwater pollution concerns.  The website is maintained by Arlington County Government (ACG) and can be accessed at ACG Website for Public to Report Stormwater Pollution Concerns.	APS/F&O	Within three months after the 2023-2028 MS4 permit's effective date.	Summary of any reports received from the public and how the permittee responded.  A webpage address to the permittee's MS4 program and stormwater website.
(4) Maintain a webpage that contains the methods for how the public can provide input on the permittee's MS4 Program.	The APS stormwater program webpage directs viewers to contact <a href="mailto:stormwater@apsva.us">stormwater@apsva.us</a> to provide input on the APS Stormwater Program. All comments received about the APS Program Plan will be responded to within 10 business days, and all comments will be filed and retained by APS for the duration of the permit cycle.	APS/F&O	Include on webpage how the public can provide input to MS4 Program. Complete.	Summary of any public input on the MS4 Program received and how the permittee responded.
(5) Implement no less than four activities per year to provide an opportunity for public involvement to improve water quality and support local restoration and clean-up projects. Include a description of the activities, anticipated time period the activities will occur, and a metric for each activity to determine if the activity is beneficial to water quality.	Our public audience participates in at least four (4) public outreach activities related to our three (3) high-priority water quality issues each year. See Section I(A)(2) of this MS4 Program Plan for a list and description of the activities and Section I(A)(5) of this MS4 Program Plan for an explanation regarding estimated time period. The metric for all activities is the number of participants for each activity.	APS/F&O APS/Teaching and Learning	Implement four activities annually.	Description of the public involvement activities.  A report of the metric as defined for each activity and an evaluation as to whether or not the activity is beneficial to improving water quality.  The name of other MS4 permittees with whom the permittee collaborated in the public involvement opportunities, if any.

Permit Requirement	BMP Name and Description	Responsible	Measurable Goal &	MS4 Annual Reporting
Terrint Requirement	Bivii Name and Description	Party	Schedule	Requirements
L Municipal Separate Stor	m Sewer System Management Program – Minimum Control Meas	,		Roganoments
	on and Elimination (MCM 3)	, di es (ivisivi) (esi	······································	
(1) Maintain an accurate storm sewer system map and information table.	Storm sewer mapping and information table are incorporated into ACG's storm drainage GIS database. Each year, infrastructure associated with newly constructed schools and school additions shall be included in the GIS as appropriate. Support provided by ACG to APS in meeting this requirement is documented in the <i>Memorandum for Agreement – Roles and Responsibilities of Arlington County and Arlington Public Schools for MS4 Permit Compliance</i> , which can be found in Appendix C of this MS4 Program Plan.	APS/F&O Coordination with ACG/DES	Submit to DEQ a GIS-compatible shapefile or PDF of the MS4 map within 24 months of permit coverage (October 31, 2025).  Update storm sewer map and information table with any changes to the MS4 by June 30 of the reporting	Confirmation statement that the GIS-compatible shapefile has been submitted within 24 months of permit coverage and that the MS4 map and information table have been updated to reflect any changes to the MS4 occurring on or before June 30 of the reporting year.
(2) Provide written notification to downstream MS4 of known physical interconnection.	APS shall notify downstream MS4s of newly discovered physical interconnections and maintain a copy of those correspondences in the corresponding annual report.  Notification of physical interconnection with ACG can be found in Appendix B.  APS has also received notification of potential upstream interconnections. VDOT contacted APS to notify of potential known interconnection between VDOT's stormwater systems and the stormwater systems APS operates. Notification was sent to APS on April 24, 2015 and can be found in Appendix B.	APS/F&O	year.  Provide written notification of interconnections as they are discovered.	Copies of written notifications of new physical interconnections to other MS4s (or by reference).
(3) Prohibit non- stormwater discharges into the storm sewer.	APS follows the ACG ordinance (County Code Chapter 26-5b) that prohibits unauthorized discharges into the storm sewer system. See Appendix C of this MS4 Program Plan for the memorandum of agreement (MOA) between APS and ACG.	APS/F&O Coordination with ACG/DES	Complete.	None.

Permit Requirement E	BMP Name and Description	Responsible	Measurable Goal &	MS4 Annual Reporting
		Party	Schedule	Requirements
I. Municipal Separate Storm	Sewer System Management Program – Minimum Control Meas	sures (MCM) (coi	ntinued)	
C. Illicit Discharge Detection	and Elimination (MCM 3) (continued)			
(4) Maintain, implement, and enforce IDDE written procedures designed to detect, identify, and address unauthorized non-stormwater discharges, including illegal dumping, to the Small MS4 to effectively eliminate the unauthorized discharge.	Illicit Discharge Detection and Elimination (IDDE) procedures are detailed in the Arlington Public Schools Illicit Discharge Detection and Elimination Program Plan, which is available on the APS Website for Stormwater Program Documents.  APS has developed a mechanism to eliminate illicit discharges to include multiple steps:  (1) Field inspections and outfall screening, (2) Immediate track down by IDDE field team during the inspection, followed by, (3) Source elimination by APS Facility staff, and if necessary, (4) Coordinating with ACG for technical assistance and any necessary enforcement action.  See Appendix C of this MS4 Program Plan for the MOA between ACG and APS.	APS/F&O	Complete.	The total number of outfalls screened during the reporting period.  A list of illicit discharges to the MS4, including: (a) Source of illicit discharge; (b) Date(s) the discharge was observed, reported, or both; (c) Whether the discharge was discovered during dry weather screening, reported by the public, or other method (describe); (d) How the investigation was resolved; (e) A description of any follow-up activities; and (f) The date the investigation was closed. This list will be maintained through the entire permit cycle and updated during every

Permit Requirement	BMP Name and Description	Responsible Party	Measurable Goal & Schedule	MS4 Annual Reporting Requirements
	m Sewer System Management Program – Minimum Control Meas	sures (MCM) (cor	ntinued)	<u> </u>
	water Runoff Control (MCM 4)			
(1) Describe legal authorities, such as ordinances, permits, orders, specific contract language, and interjurisdictional agreements, utilized to address discharges entering the MS4 from regulated construction site stormwater runoff.	The following is a relevant legal authority maintained by APS:  Construction Contract Language – APS has standard contract language requiring DEQ Erosion and Sediment Control (E&SC), Stormwater Management (SWM) inspector, and Registered Land Disturber (RLD) certification; proper record keeping of the SWPPP; inspections of the site at least every four (4) days; and compliance with APS' MS4 Permit.  APS also complies with the following ACG legal authorities related to construction site runoff control:  • ACG Plan Review Procedures • Chesapeake Bay Preservation Ordinance • Compliance Inspection Procedures • Erosion and Sediment Control Ordinance • Stormwater Management Ordinance  See Appendix C of this MS4 Program Plan for the MOA between	ACG/DES APS/D&C	Complete.	None.
(2) Written inspection procedures to ensure erosion and sediment controls are properly implemented. Identify all associated documents utilized during inspection, including the inspection schedule.	Since APS is a subdivision of a local government (school board), the MS4 Permit requires the inspection of projects resulting in a land disturbance of 10,000 square feet or greater, 2,500 square feet or greater in accordance with areas designated under the Chesapeake Bay Preservation Act, or in accordance with more stringent thresholds established by the local government.  ACG is the regulatory authority for construction activity on APS property. ACG performs all formal inspections pertaining to MCM 4.  ACG provides enforcement of construction site stormwater runoff control in conformance with state standards. ACG's compliance and enforcement procedures and all associated documents may be found online at ACG Plan Review Procedures.	ACG/DES	ACG will inspect applicable projects:  (a) During or immediately following initial installation of erosion and sediment controls;  (b) At least once per every two-week period;  (c) Within 48 hours following any	Total number of inspections and enforcement actions performed by ACG on APS properties.

Permit Requirement	BMP Name and Description	Responsible	Measurable Goal &	MS4 Annual Reporting	
		Party	Schedule	Requirements	
	I. Municipal Separate Storm Sewer System Management Program – Minimum Control Measures (MCM) (continued)				
D. Construction Site Storm	water Runoff Control (MCM 4) (continued)				
	See Appendix C of this MS4 Program Plan for the MOA between ACG and APS.		runoff-producing storm event; and		
			(d) at the completion of the project prior to the release of any performance bond.		
(3) Written procedures for requiring compliance through corrective action or enforcement action.	ACG provides enforcement of construction site stormwater runoff control in conformance with state standards. ACG's compliance and enforcement procedures and all associated documents may be found online at <a href="ACG Plan Review Procedures">ACG Plan Review Procedures</a> .  See Appendix C of this MS4 Program Plan for the MOA between ACG and APS.	ACG/DES APS/D&C	Complete.	None.	
(4) Identify roles and responsibilities in implementing the construction site stormwater runoff control requirements.	APS' Design and Construction Department is responsible for providing an owner's representative for ensuring compliance with County plan review, inspections, and enforcement activities.  APS requires in its contract language that construction firms provide an onsite construction manager certified as a Stormwater and Erosion & Sediment Control Inspector to ensure compliance with County ordinances.  ACG is the regulatory authority for construction activity on APS property. ACG performs all plan reviews, formal inspections, and enforcement actions pertaining to MCM 4.  See Appendix C of this MS4 Program Plan for the MOA between ACG and APS.	ACG/DES APS/D&C	Complete.	Confirmation statement that land-disturbing projects that occurred during the reporting period have been conducted in accordance with approved standards and specifications for erosion and sediment control.  If one or more of the land-disturbing projects were not conducted with the department approved standards and specifications, an explanation as to why	

Permit Requirement	BMP Name and Description	Responsible	Measurable Goal &	MS4 Annual Reporting
		Party	Schedule	Requirements
I. Municipal Separate Stor	m Sewer System Management Program – Minimum Control Mea	sures (MCM) (cor	ntinued)	
D. Construction Site Storm	nwater Runoff Control (MCM 4) (continued)			
				the projects did not
				conform to the approved
				standards and
				specifications.
				specifications.

Permit Requirement	BMP Name and Description	Responsible Party	Measurable Goal & Schedule	MS4 Annual Reporting Requirements
	m Sewer System Management Program – Minimum Control Meas			
	nwater Management: Operator-Owned Stormwater Managemen			
(1) Describe legal authorities, such as ordinances, permits, orders, specific contract language, and interjurisdictional agreements, utilized to address postconstruction stormwater runoff control.	<ul> <li>APS is the sole owner of stormwater management facilities on APS properties and the sole legal authority assuring compliance with MCM 5. Mechanisms which help ensure compliance with this MCM include:         <ul> <li>Service Contract with Third-Party Inspection and Maintenance Contractor</li> </ul> </li> <li>APS Standard Operating Procedures (SOPs) for Inspection and Maintenance. APS follows ACG Guidelines for Inspection and Maintenance of Stormwater Facilities at Stormwater Management Facility Inspections.</li> </ul>	APS/F&O	Update list in the MS4 Program Plan as additional legal authorities are developed, if any.	None.
(2) Develop and maintain written inspection and maintenance procedures of stormwater management facilities.	ACG provides all final inspections for newly constructed stormwater facilities. APS follows the guidelines established by ACG for the inspection and maintenance of stormwater facilities, which may be found on the ACG website under <a href="Stormwater Management Facility Inspections">Stormwater Management Facility Inspections</a> . APS' SOPs for inspection and maintenance closely follow ACG's inspection checklist and may be found in Appendix D of this MS4 Program Plan. All inspection and maintenance reports are kept at APS' Department of Facilities and Operations (F&O). See Appendix C of this MS4 Program Plan for the MOA between ACG and APS.	APS/F&O	Update inspection and maintenance procedures as needed.	None.
(3) Identify the roles and responsibilities in implementing the requirements of MCM 5.	APS's Department of Facilities and Operations is responsible for ensuring overall implementation of this MCM.  APS contracts with a third party for inspection, operation, and maintenance of all its stormwater management facilities. A copy of the contract agreement with this third party is included in Appendix E of this MS4 Program Plan.  ACG manages a master database containing all of APS' Best Management Practices (BMPs). APS and ACG collaborate closely to make sure this database is up to date. See Appendix C of this MS4 Program Plan for the MOA between ACG and APS.	APS/F&O	Update roles and responsibilities in the MS4 Program Plan as there are changes, if any.	None.

	DIADA LA	- II.		1.00.0			
Permit Requirement	BMP Name and Description	Responsible	Measurable Goal &	MS4 Annual Reporting			
		Party	Schedule	Requirements			
	I. Municipal Separate Storm Sewer System Management Program – Minimum Control Measures (MCM) (continued)						
E. Post-Construction Storn	E. Post-Construction Stormwater Management: Operator-Owned Stormwater Management Inspection Procedures (MCM 5) (continued)						
	APS follows ACG guidelines for Inspection and Maintenance of						
	Stormwater Facilities: Stormwater Management Facility						
	<u>Inspections.</u>						
(4) Inspect stormwater	APS contracts with a third party for long-term operation and	APS/	Inspect stormwater	Total number of			
management facilities no	maintenance of all its stormwater management facilities. APS'	Maintenance	management	inspections conducted on			
less than once per year.	third-party contractor conducts inspections annually on all		facilities annually.	stormwater management			
	stormwater management facilities. The contractor is required			facilities.			
	to schedule inspections in a timely fashion and ensures all						
	facilities are functioning as originally designed via regular						
	inspections and maintenance. See Appendix E of this MS4						
	Program Plan for the agreement with the third-party						
	contractor.						
	The most recent inspection dates are kept online as part of an						
	electronic database maintained by ACG. APS is responsible for						
	the accuracy of APS's stormwater facility information.						
(5) Conduct the	If during the inspection it is determined that maintenance is	APS/	Conduct	Description of the			
maintenance of	required, the third-party contractor conducts maintenance in a	F&O	maintenance of	significant maintenance,			
stormwater management	timely manner, in accordance with written procedures		stormwater	repair, or retrofit			
facilities.	developed as part of this MCM. APS's third-party contractor		management	activities performed on			
	conducts maintenance at least annually on all APS stormwater		facilities as needed.	the stormwater			
	management facilities. The contractor is required to schedule			management facilities			
	maintenance in a timely fashion and provides a detailed report			owned or operated by			
	afterwards that includes photo documentation of the			the permittee to ensure			
	stormwater facilities during inspection and after maintenance.			it continues to perform			
	All inspection reports and maintenance invoices are kept on file			as designed.			
	by APS' Department of Facilities and Operations.						
	<u>'</u>	l					

Permit Requirement	BMP Name and Description	Responsible	Measurable Goal & Schedule	MS4 Annual Reporting	
I Municipal Congrets Ctor	m Couver Custom Management Drawsm Minimum Central Mass	Party (MCNA) (acr		Requirements	
·	m Sewer System Management Program – Minimum Control Meas			au ad)	
	E. Post-Construction Stormwater Management: Operator-Owned Stormwater Management Inspection Procedures (MCM 5) (continued)				
(6) Maintain an electronic database or spreadsheet of all known permittee-owned or permittee-operated and privately owned stormwater management facilities that discharge into the MS4.	ACG maintains the electronic database of all stormwater management facilities including APS' stormwater management facilities. APS is responsible for the accuracy of this information and works closely with ACG to ensure the database remains up to date. See Appendix C for the MOA between ACG and APS.  New stormwater management facilities brought online or discovered during the reporting year are listed in the MS4 Annual Report located on our website at APS Website for Stormwater Program Documents.	ACG/DES in coordination with APS/F&O	Spreadsheet updated no later than 30 days after a new stormwater management facility is brought online or an existing stormwater management facility is discovered.	None; however, the annual report captures all new stormwater management facilities brought online or discovered during the reporting year.	
(7) Report post-construction runoff control BMPs in the DEQ Construction Stormwater Database.	APS, ACG, and their contractors obtain coverage under the General VPDES Permit for Discharges of Stormwater from Construction Activities (Construction General Permit) for all qualifying land disturbing projects. Stormwater management facilities installed after July 1, 2014 to address the control of post-construction runoff from CGP-covered land disturbing activities are listed on the Notice of Termination (NOT) upon completion of the project. Including the stormwater management facility on the NOT ensures that it is entered into the DEQ Construction Stormwater Database by association DEQ personnel.	ACG/DES in coordination with APS/F&O	Report stormwater management facilities through the DEQ Construction Stormwater Database as they are installed.	Confirmation statement that required stormwater management facility information was submitted in NOTs for entry into the Virginia Construction Stormwater General Permit database, or a statement that no projects requiring coverage under Construction General Permit were completed.	
(8) Report applicable BMPs into the DEQ BMP Warehouse.	APS will electronically report the stormwater management facilities and BMPs implemented between July 1 and June 30 of each year using the DEQ BMP Warehouse and associated reporting template for any practices for which a General VPDES Permit for Discharges of Stormwater from Construction Activities was not required.	APS/F&O	Report BMPs implemented during the reporting period into the DEQ BMP Warehouse no later than October 1 of each year.	Confirmation statement that the permittee electronically reported BMPs using the DEQ BMP Warehouse in accordance with MCM 5 and the date on which the information was submitted.	

Permit Requirement	BMP Name and Description	Responsible	Measurable Goal & Schedule	MS4 Annual Reporting Requirements
1 Municipal Congrete Store	l m Sewer System Management Program – Minimum Control Meas	Party		Requirements
	ood Housekeeping For Municipal Operations (MCM 6)	sures (Micivi) (cor	itiliueu)	
(1) Maintain and implement written procedures for pollution prevention and good housekeeping.	The following Policy Implementation Procedures (PIPs) are in place at APS and incorporate the required Good Housekeeping procedures. These PIPs may be found online under our school board policies section for Support Services:  (1) E-3.30 PIP-1 Housekeeping and Grounds Keeping  (2) E-3.30 PIP-2 Trash and Recycling  (3) E-3.31 PIP-3 Occupational Health, which requires that hazardous materials be identified and disposed of properly.  (4) E-3.31 PIP-7 Environmental Compliance, which requires that hazardous waste material be identified and disposed of properly.	APS/F&O in coordination with ACG/DES	Update written procedures as needed.	A summary of any operational procedures developed or modified in accordance with MCM 6 during the reporting period.
(2) Identify high-priority facilities with a high potential of discharging pollutants.	APS operates one (1) high-priority municipal facility with a high potential of discharging pollutants: the APS Trades Facility located at the ACG Trades Center.  The annual report identifies the APS Trades Facility as a municipal high-priority facility.	APS/F&O	Identify high-priority facilities within 12 months after the effective date of the 2023-2028 MS4 Permit.	None.
(3) Maintain and implement a site-specific stormwater pollution prevention plan (SWPPP) for each facility identified.	APS' Trades Facility is included in ACG's SWPPP for the Trades Center. APS is responsible for this facility under ACG's Trade Center SWPPP and inspects and maintains the area. In collaboration with ACG, APS participates in quarterly inspections of the Trades Facility as part of the ACG SWPPP. APS is responsible for any follow-up recommendations from these quarterly inspections. A copy of the SWPPP is maintained at the APS Trades Center.  See Appendix C of this MS4 Program Plan for the MOA between ACG and APS.	APS/F&O	Complete. Should another facility be identified in the future, APS will coordinate with ACG to develop a SWPPP no later than December 31 of the year in which the high-priority facility was identified.	Summary of any new SWPPPs developed in accordance with MCM 6 during the reporting period.  Summary of any SWPPPs modified, or the rationale of any high-priority facilities delisted, in accordance with MCM 6 during the reporting period.

Permit Requirement	BMP Name and Description	Responsible Party	Measurable Goal & Schedule	MS4 Annual Reporting Requirements
I. Municipal Separate Stor	m Sewer System Management Program – Minimum Control Meas	sures (MCM) (cor	ntinued)	
F. Pollution Prevention/Go	ood Housekeeping For Municipal Operations (MCM 6) (continued)			
(4) Review any high- priority facility owned or operated by the permittee for which a SWPPP has not been developed to determine if the facility has a high potential to discharge pollutants.	APS does not currently own any additional high-priority facilities with a high potential of discharging pollutants.  However, should any facilities be acquired or constructed, APS will conduct reviews to determine if the facility has a high potential to discharge pollutants.  See Appendix C of this MS4 Program Plan for the MOA between ACG and APS.	APS/F&O	N/A. Should another facility be acquired or constructed in the future, APS or ACG will conduct reviews annually, no later than June 30 of each year.	None.
(5) Develop a SWPPP meeting the requirements of this MCM for any newly identified facility with high potential to discharge pollutants.	APS does not currently own any additional high-priority facilities with a high potential of discharging pollutants. However, should a facility be identified, APS will work with ACG so that a SWPPP is developed for the facility.  See Appendix C of this MS4 Program Plan for the MOA between ACG and APS.	APS/F&O	N/A. If applicable in the future, APS or ACG will develop a SWPPP no later than December 31 of the year in which the high-priority facility was identified.	Summary of any new SWPPPs developed in accordance with MCM 6 during the reporting period.
(6) Review SWPPP after unauthorized discharge, release, or spill reported.	APS has not had any unauthorized discharge, release, or spill reported so has not yet conducted a SWPPP review. Should an unauthorized discharge, release, or spill occur, APS will work with ACG so that the SWPPP is reviewed to determine if additional measures are necessary to prevent future unauthorized discharges, releases, or spills.	APS/F&O	Review SWPPP no later than 30 days after any unauthorized discharge, release, or spill.	None.
(7) Update SWPPP after unauthorized discharge, if necessary.	APS has not had any unauthorized discharge, release, or spill reported so has not yet conducted a SWPPP review. Should an unauthorized discharge, release, or spill occur, APS will work with ACG so that the SWPPP is updated.	APS/F&O	Update SWPPP no later than 90 days after the unauthorized discharge.	Summary of any SWPPPs modified in accordance with MCM 6 during the reporting period.
(8) SWPPP shall be kept at the high-priority facility and utilized as part of staff training required in this MCM.	A copy of the SWPPP is maintained at the APS Trades Center and used as part of staff training required in MCM 6.	APS/F&O	Keep SWPPP at facility as soon as SWPPP is developed.	None.

Permit Requirement	BMP Name and Description	Responsible	Measurable Goal &	MS4 Annual Reporting
		Party	Schedule	Requirements
	m Sewer System Management Program – Minimum Control Meas		itinued)	
	ood Housekeeping For Municipal Operations (MCM 6) (continued)			
(9) Maintain and	ACG uses a turf management contractor to manage all	ACG/DPR in	Update NMPs prior	Summary of turf and
implement turf and	necessary pesticide, herbicide, and fertilizer applications for	coordination with APS/F&O	to plan expiration dates.	landscape NMPs
landscape nutrient management plans	athletic fields. ACG uses this turf management contractor to maintain/apply nutrients to lands owned by APS. This	WILLI AP3/F&U		developed that includes:
developed by a certified	contractor develops and implements the Nutrient Management		Develop new plans	(a) Location and the total
turf and landscape	Plans (NMPs) for APS lands with a contiguous area greater than		for any new area	acreage of each land
nutrient management	one (1) acre.		requiring an NMP.	area;
planner where nutrients are applied to a	APS currently has ten (10) locations that meet this criterion.			(b) The date of the approved NMP; and
contiguous area greater	ACG staff worked with their turf management contractor to develop and implement turf and landscape NMPs for all ten			(c) Location in which the
than one (1) acre.	(10) APS locations. NMPs have been developed and			individual NMPs are
	implemented for all locations. The most recent MS4 Annual			located.
	Report identifies a list of lands for which NMPs are required,			
	total acreage on which nutrients are applied, the date of the			
	most recent NMP for each property, and location in which the			
	NMPs are located. Refer to the MS4 Annual Report located on			
	our website at APS Website for Stormwater Program			
	Documents.			
(10) Identify mechanisms	Contractors are trained and/or certified as specified in Sections	APS/F&O in	ACG will continue to	None.
that require that	(11d), (11e), and (11f) below to ensure implementation of	coordination	ensure that	
contractors engaging in	the necessary good housekeeping and pollution prevention	with ACG/DES	contractors are	
activities with the	procedures.		trained and/or	
potential to discharge			certified prior to	
pollutants use appropriate control			their conducting work on behalf of	
measures to minimize			APS.	
the discharge of			AI J.	
pollutants to the MS4.				

		T		
Permit Requirement	BMP Name and Description	Responsible	Measurable Goal &	MS4 Annual Reporting
		Party	Schedule	Requirements
I. Municipal Separate Stori	m Sewer System Management Program – Minimum Control Meas	sures (MCM) (cor	ntinued)	
F. Pollution Prevention/Go	ood Housekeeping For Municipal Operations (MCM 6) (continued)			
(11) Develop a written	Sections (11a) through (11g) that follow serve as the written	APS/F&O in	Complete.	List of the training events
training plan for	training plan to meet this requirement.	coordination		conducted in accordance
applicable staff that		with ACG/DES		with MCM 6, including:
meets the requirements				(a) The date of the
of MCM 6 as listed in the				training event;
2023-2028 MS4 Permit.				(b) The number of
				employees who attended
				the training event; and
				(c) The objective of the
				training event.
(11a) Train field	ACG provides APS personnel annual training in recognition and	APS/F&O in	Train field personnel	See (11) above.
personnel in the	reporting of illicit discharge in conjunction with ACG's training	coordination	no less than every	000 (11) 45010.
recognition and reporting	schedule.	with ACG/DES	24 months.	
of illicit discharges.	oniodaloi	William to Grade	Z i montris.	
or more disorial gos.	See Appendix C of this MS4 Program Plan for the MOA between			
	ACG and APS.			
	710 Curia 711 C.			
(11b) Train employees	Good housekeeping and pollution prevention practices are	APS/F&O in	Train	See (11) above.
performing road, street,	employed during parking lot maintenance, and in and around	coordination	aforementioned	
and parking lot	APS facilities and in the field. Annual good housekeeping and	with ACG/DES	employees no less	
maintenance in pollution	pollution prevention training is provided to those APS staff.		than every 24	
prevention and good	, , , , , , , , , , , , , , , , , , ,		months.	
housekeeping associated	See Appendix C of this MS4 Program Plan for the MOA between			
with those activities.	ACG and APS.			
L	I	I	l	

Permit Requirement	BMP Name and Description	Responsible Party	Measurable Goal & Schedule	MS4 Annual Reporting Requirements
I. Municipal Separate Stor	m Sewer System Management Program – Minimum Control Meas	sures (MCM) (cor	ntinued)	
F. Pollution Prevention/Go	ood Housekeeping For Municipal Operations (MCM 6) (continued)			
(11c) Ensure that employees working in and around maintenance, public works, or recreational facilities receive training in good housekeeping and pollution prevention practices associated with those facilities.	APS custodial staff are employed around outdoor fields during the school days. Annual good housekeeping and pollution prevention training is provided to those APS custodial staff.  See Appendix C of this MS4 Program Plan for the MOA between ACG and APS.	APS/F&O in coordination with ACG/DES	Train aforementioned employees no less than every 24 months.	See (11) above.
(11d) Ensure that employees and contractors who apply pesticides and herbicides are trained or certified in accordance with the Virginia Pesticide Control Act (§ 3.2-3900 et seq. of the Code of Virginia).	Arlington County Department of Parks and Recreation (DPR) hires a certified contractor who applies nutrients and pesticides on all County and School lands. ACG tracks the status of certifications as part of their MS4 permit obligation. Nutrient Management Plans for school properties are located at DPR and a copy is held at APS' Department of Facilities and Operations.  See Appendix C of this MS4 Program Plan for the MOA between ACG and APS.	APS/F&O in coordination with ACG/DES	Ensure employees and contractors are trained or certified prior to the application of pesticides and herbicides.	None.
(11e) Ensure that employees and contractors serving as plan reviewers, inspectors, program administrators, and construction site operators obtain the appropriate certifications.	APS relies on ACG, as the local government regulatory authority, for permitting, inspection, and enforcement services related to erosion and sediment control. Additionally, APS has been requiring that construction firms provide an onsite construction manager (CM) to be certified as a Stormwater and Erosion & Sediment Control (E&SC) Inspector to ensure compliance with County ordinances. All certificates are verified as part of every contract. See (11f) below for contract language. Select APS in-house staff members, including construction management staff, are certified as stormwater inspectors, E&SC inspectors, and combined stormwater and E&SC program administrators. See Appendix C of this MS4 Program Plan for the MOA between ACG and APS.	APS/F&O in coordination with ACG	ACG ensures that employees and contractors are certified prior to undertaking their associated duties.	None; however, the Annual Reports list APS in-house staff and construction management staff certified as stormwater inspectors, E&SC inspectors, and combined stormwater and E&SC program administrators.

Permit Requirement	BMP Name and Description	Responsible Party	Measurable Goal & Schedule	MS4 Annual Reporting Requirements		
I. Municipal Separate Stor	m Sewer System Management Program – Minimum Control Meas	sures (MCM) (cor	itinued)			
F. Pollution Prevention/Go	F. Pollution Prevention/Good Housekeeping For Municipal Operations (MCM 6) (continued)					
(11f) Ensure that employees and contractors implementing the stormwater program obtain the appropriate certifications as required under the Virginia	APS ensures that employees and contractors are certified prior to implementing the stormwater program.  APS requires proper certification for stormwater management oversight on construction sites in their bid documents. APS closely coordinates with ACG regarding proper oversight and control measures for stormwater discharges. The following language is used in our bid documents. See Appendix C of this	APS/F&O	APS ensures that employees and contractors are certified prior to implementing the stormwater program.	None.		
Stormwater Management Act and its attendant regulations.	MS4 Program Plan for the MOA between ACG and APS.  ESC and SWM Certification. An onsite construction manager (CM) team member shall hold and maintain for the duration of the project the Virginia DEQ E&SC and SWM inspector certification. Per the certification, this member shall ensure proper record keeping of the SWPPP by the contractor, conduct self-inspections of the site at least every four (4) days, and ensure compliance with APS' MS4 Permit as it relates to construction site stormwater runoff control and proper E&SC. The CM shall also provide on-site personnel certified for and designated as the Registered Land Disturber (RLD).					
(11g) Ensure that employees whose duties include emergency response have been trained in spill response.	Spill Response Training is handled by ACG with their safety personnel. Training is required for Arlington County Police Department and Arlington County Fire Department emergency response personnel. Please refer to ACG's annual report on spill response training.	APS/F&O in coordination with ACG/DES	Not applicable. APS personnel duties do not include emergency response.	Not applicable. APS personnel duties do not include emergency response.		
(12) Maintain documentation of each training event.	Training events are kept on file by the appropriate office.	APS/F&O in coordination with ACG/DES	Maintain documentation for a minimum of three years after the training event.	List of the training events conducted, including date, number of employees attending, and objective of the training event.		

Permit Requirement	BMP Name and Description	Responsible Party	Measurable Goal & Schedule	MS4 Annual Reporting Requirements
II. TMDL Special Condition				
A. Chesapeake Bay TMDL S				
(1) Reduce the load of total nitrogen, total phosphorus, and total suspended solids by at least 100% of the Level 2 (L2) Scoping Run	APS will execute the most recent version of its Phase III (100%) Chesapeake Bay Total Maximum Daily Load (TMDL) Action Plan to achieve total nitrogen, total phosphorus, and total suspended solids load reductions through the means and methods identified in the plan. APS' strategy set forth in the TMDL Action Plan includes nutrient and sediment credit	APS/F&O	Reduce loads by at least 100% no later than October 31, 2028.	A list of BMPs implemented during the reporting period, and the estimated reduction by each reported in pounds per year.
Reductions.	purchase with the Arlington Water Pollution Control Plant to meet the remaining pollution reduction requirements not met by implementation of stormwater management practices.			A statement that nutrient credits were acquired, if applicable.
	APS executed a <i>Chesapeake Bay Nutrient Offset Agreement</i> between APS and ACG's Water Pollution Control Plant for the purchase of total phosphorous and total suspended solids			The progress toward meeting the required cumulative reductions.
	credits to meet the 40% POC required reductions, a condition of the 2018-2023 MS4 Permit. The agreement went into effect on June 30, 2023 and expires on June 30, 2028. A copy of the nutrient offset agreement is located in Appendix F.			A list of BMPs planned to be implemented during the next reporting period.
(2) Offset 100% of the increased loads from new sources.	The revised APS Chesapeake Bay TMDL Action Plan accounts for increased loads from new sources initiating construction between July 1, 2009 and October 31, 2023. The Draft Chesapeake Bay TMDL Action Plan submitted to DEQ with the Registration Statement and application for coverage under the 2023-2028 MS4 Permit was developed accounting for new sources initiating construction between July 1, 2009 and June 30, 2014, as specified in the Chesapeake Bay TMDL Action Plan Guidance Memo (Guidance Memo No. 20-2005, dated February 6, 2021).	APS/F&O	Offset 100% of increased loads from new sources no later than October 31, 2028.	Copy of the revised Chesapeake Bay TMDL Action Plan.
(3) Offset the increased loads from grandfathered projects.	Permittees are required to offset increased loads from projects grandfathered in accordance with 9VAC25-870-48 that begin construction after July 1, 2014. APS has no projects that meet these requirements; therefore, no offset is required.	APS/F&O	None. APS has no applicable projects.	None.

Permit Requirement	BMP Name and Description	Responsible Party	Measurable Goal & Schedule	MS4 Annual Reporting Requirements			
II. TMDL Special Condition	II. TMDL Special Conditions (continued)						
A. Chesapeake Bay TMDL S	Special Condition (continued)						
(4) Submit an updated Chesapeake Bay TMDL action plan that meets the requirements of the Chesapeake Bay TMDL Special Condition of the 2023-2028 MS4 Permit.	APS will review its Chesapeake Bay TMDL Action Plan to determine compliance with the requirements of the Chesapeake Bay TMDL Special Condition of the 2023-2028 MS4 Permit. If revisions are necessary to comply, APS will revise its TMDL Action Plan and resubmit to DEQ for review.	APS/F&O	Submit updated TMDL Action Plan no later than 12 months after the 2023-2028 MS4 Permit effective date.	Statement of the status of the Chesapeake Bay TMDL Action Plan (e.g., Draft submitted to DEQ, Public Notice, Final approved by DEQ).  Copy of the revised Chesapeake Bay TMDL Action Plan.			
B. Local TMDL Special Con-	dition			·			
(1) Develop a local TMDL action plan, if applicable, and incorporate each local TMDL action plan into the MS4 Program Plan.	APS has not been allocated a wasteload for any EPA-approved TMDLs, so is not required to develop a local TMDL Action Plan. APS shall continue to monitor updates to Local TMDLs for wasteload allocations (WLAs).	APS/F&O	Monitor updates to Local TMDLs for WLAs.	Statement that TMDL Action Plan has been developed, if applicable.			

## Appendix A

List of Responsible Department Names and Acronyms

## Appendix A – List of Responsible Department Names and Acronyms

Agency	Acronym
Arlington County Department of Environmental Services	DES
Arlington County Department of Parks and Recreation	DPR
Arlington County Government	ACG
Arlington Public Schools	APS
APS Design and Construction	D&C
APS Facilities and Operations	F&O
Virginia Department of Environmental Quality	DEQ

## Appendix B APS Physical Interconnection Notification Letters



## DEPARTMENT OF FACILITIES AND OPERATIONS

2770 South Taylor Street • Arlington, VA 22206 • Phone: (703) 228-6600 Fax: (703) 671-2959

August 14, 2015

Mr. Jason Papacosma
Department of Environmental Services
Office of Sustainability and Environmental Management
2100 Clarendon Blvd., Suite 705
Arlington, VA 22201

Dear Mr. Papacosma:

Arlington Public Schools (APS) is a Phase II small MS4 and is covered under the Virginia Pollutant Discharge Elimination System (VPDES) General Permit for Discharge of Stormwater from Small Municipal Separate Storm Sewer Systems (General Permit Number VAR040127). We are notifying you of interconnections between APS and Arlington County's storm sewer networks. We have provided updated infrastructure maps to your office that identifies our interconnections.

Please feel free to contact me at 703-228-7731 or <a href="mailto:cathy.lin@apsva.us">cathy.lin@apsva.us</a> if you have any questions. Thank you.

Sincerely,

Catherine J. Lin Energy Manager



## COMMONWEALTH of VIRGINIA

## DEPARTMENT OF TRANSPORTATION 1401 EAST BROAD STREET RICHMOND, VIRGINIA 23219 2000

Charles A. Kilpatrick, P.E. Commissioner April 24, 2015

Ms. Catherine Lin Energy Manager Arlington County Public Schools 2770 South Taylor Street Arlington, VA 22206

Attention: MS4 Permit Manager

Subject: MS4 Permit; Notice of Potential Interconnected Stormwater Systems

Dear Ms. Lin:

The Virginia Department of Transportation (VDOT) is a Phase II small MS4 and is covered under the Virginia Pollutant Discharge Elimination System (VPDES) General Permit for Discharge of Stormwater from Small Municipal Separate Storm Sewer System (Registration Number VAR040115).

The purpose of this letter is to notify you of the potential for interconnection between the stormwater systems operated by VDOT and the stormwater systems that you operate. The MS4 permit requires that VDOT notify, in writing, any downstream regulated MS4 to which VDOT is physically interconnected. At this time, we have not identified any points where VDOT discharges stormwater into your regulated MS4 stormwater system; however we believe that there are likely interconnections between our systems. There is no action required on your part at this time, as this letter is for notification purposes only.

If you have questions or desire additional information related to this subject please contact me at (804) 786-9013 or <a href="mailto:Roy.Mills@VDOT.Virginia.gov">Roy.Mills@VDOT.Virginia.gov</a>.

Sincerely,

Roy T. Mills

State Stormwater Management

Program Administrator

Koy T Most

VirginiaDOT.org
WE KEEP VIRGINIA MOVING

# Appendix C Memorandum for Agreement – Roles and Responsibilities of Arlington County and Arlington Public Schools for MS4 Permit Compliance



2100 Clarendon Boulevard, Suite 900, Arlington, VA 22201
TEL 703-228-3711 FAX 703-228-3594 www.arlingtonva.us

## **June 2023**

## Memorandum of Agreement – Roles and Responsibilities of Arlington County and Arlington Public Schools for MS4 Permit Compliance

This Memorandum of Agreement (Agreement) documents the roles Arlington County (County) currently undertakes to support Arlington Public Schools (APS) with compliance of specific provisions of APS' Phase II Municipal Separate Storm Sewer System (MS4) permit program (VAR040127), as well as APS' responsibilities for compliance with each of these provisions.

The following table outlines these roles and responsibilities.

	MS4 Permit Requirement	APS Responsibility	County Support,
	(APS)		Implementation, and/or Regulatory Role
1.	The permittee shall maintain an accurate storm sewer system map and information table.	APS will provide accurate information to the County as soon as it becomes available to help keep the County's stormwater GIS mapping database up to date.	Support The County will continue to maintain its GIS mapping database, which includes APS data. As part of an on-going process, updates are made following the receipt and review of new information.
2.	The permittee shall prohibit, through ordinance or other legal mechanism, non-stormwater discharges into the storm sewer system.	APS will take measures to prevent unauthorized non-stormwater discharges from APS facilities or activities. APS will investigate any Illicit Discharges (ID) from its properties. APS will notify the County about any ID incidents to the County's MS4 or surface waters.	Regulatory Arlington County Code Chapter 26-7 C prohibits unauthorized discharges to the storm drain system. County staff will assist APS staff upon request to investigate ID incidents on School property. If the incident involves an unauthorized discharge to the County's MS4 or surface waters, the County will conduct enforcement action.

	MS4 Permit Requirement (APS)	APS Responsibility	County Support, Implementation, and/or Regulatory Role
3.	Minimum Control Measure 4: Construction site runoff  a.) The permittee shall provide a description of the legal authorities responsible for ensuring compliance with this minimum control measure.  b.) The permittee shall identify the legal authorities responsible for plan review procedures and all associated documents utilized in plan review.  c.) The permittee shall identify the legal authorities responsible for inspection procedures and all associated documents.	APS will comply with state and local regulations pertaining to land disturbing activities. APS will apply for permits and provide construction oversight to ensure compliance with Virginia Stormwater Management Program (VSMP) and Virginia Erosion and Sediment Control Program (VESCP) regulations and County code.  APS will submit plans and supporting documents in accordance with State regulations and County Code.  APS will ensure all construction projects are conducted in compliance with State regulations and County Code.  APS will ensure contractors comply with contract environmental compliance and performance requirements and properly implement stormwater pollution prevention plans (SWPPP) required by State regulations and County Code, including ensuring that SWPPP self-inspections are conducted by certified personnel.	Regulatory As the local VSMP/VESCP authority, the County administers a VSMP and Erosion and Sediment Control (ESC) Program.  As the local VSMP/VESCP authority, the County reviews plans for land disturbance activities. Plan review procedures and associated documentation are outlined in the County's Stormwater Management Ordinance, Erosion and Sediment Control Ordinance, and Stormwater Manual.  As the local VSMP/VESCP Authority, the County inspects projects that disturb >2500 square feet of land. The County conducts enforcement actions for violations as outlined under County code, including issuing Notices of Violation (NOVs) and stop work orders.  The County can also issue NOVs, including fines, under Chapter 26 of the County Code for unauthorized discharges to the County's MS4 or surface waters from APS construction activities.
4.	The permittee shall maintain an updated electronic database of all known operator-owned stormwater management facilities (SWMF) that discharge into the small MS4.	APS will provide accurate information and work with the County to ensure the information for APS facilities in the County's database remains up to date. APS is responsible for submitting SWMF data to DEQ and verifying accuracy.	The County maintains an electronic database of all public and private Stormwater Management Facilities (SWMFs) within the County, including all APS facilities.

	MS4 Permit Requirement (APS)	APS Responsibility	County Support, Implementation, and/or Regulatory Role
5.	The permittee shall identify all High Priority Municipal Facilities (HPMFs) and develop and implement Stormwater Pollution Prevention Plans (SWPPP) for those facilities.	APS will identify all existing and future HPMFs and will develop and implement SWPPPs for any future HPMF on APS or County property, including inspections*. APS will ensure pollution prevention practices are implemented at its facilities.  For the Trades Center (TC) SWPPP covering both County and APS operations at the facility, APS will provide information to update the SWPPP and is responsible for implementation of SWPPP requirements for its operations on APS property.  For the TC SWPPP, APS staff may accompany County staff during APS facility inspections and address any identified corrective actions.  *Unless both APS and the County agree that the County will take the lead for SWPPP development and inspections for APS HPMFs	APS' Operations Facility is located within to the County's Trades Center (an HPMF). This APS facility is included in the TC SWPPP, and the County conducts inspections of this APS facility under the SWPPP. The County is not responsible for implementation of the APS section of the plan, nor any corrective actions identified during inspections.  The County can provide technical assistance to APS upon request for development of future SWPPPs for HPMFs on APS properties.
6.	The permittee shall implement turf and landscape Nutrient Management Plans (NMPs) developed by a certified turf and landscape nutrient management planner on all lands owned or operated by the permittee where nutrients are applied to a contiguous area greater than one acre.	APS will develop an agreement for the maintenance of athletic fields with County Department of Parks and Recreation (DPR).  APS will maintain a list of all areas greater than one acre within APS lands where nutrient application occurs. Modifications to this list will be communicated to DPR accordingly.	Implementation  DPR uses a certified turf nutrient management contractor to develop and implement NMPs for County and APS lands where nutrients are applied to a contiguous area greater than one acre. NMPs for school sites are kept with DPR, and a copy is kept with APS' Department of Facilities and Operations.

	MS4 Permit Requirement (APS)	APS Responsibility	County Support, Implementation, and/or Regulatory Role
7.	The permittee will conduct biennial training to applicable personnel in recognition and reporting of illicit discharges, good housekeeping, and pollution prevention.	APS is responsible for training of applicable personnel on recognition of illicit discharges, pollution prevention, and good housekeeping. Applicable APS staff include maintenance, transportation, and custodial employees. APS will notify applicable staff about trainings and require attendance. APS will keep training documentation and record attendance by APS staff.	Support The County will provide technical assistance and, upon request, in-person support to APS staff for required trainings.
8.	The permittee shall ensure that Employees and contractors who apply pesticides and herbicides are trained or certified in accordance with the Virginia Pesticide Control Act (§ 3.2-3900 et seq. of the Code of Virginia).	APS is responsible for training and certification of APS staff if APS staff apply pesticides/herbicides.  APS will ensure that APS staff that applies pesticides have the proper certifications from VDACS. APS will keep a list of APS staff that are certified to apply pesticides.  APS will ensure that contracts that require pesticide application will require proper certification of individuals using pesticides.	Implementation and Support DPR hires a certified contractor who applies pesticides/herbicides where needed on all athletic fields located on County and School lands. ACG tracks the status of staff certifications as part of their MS4 permit obligation. DPR may assist APS in applying pesticides/herbicides to other APS lands upon request.
9.	The permittee shall ensure that employees whose duties include emergency response have been trained in spill response.	APS personnel do not perform emergency response and therefore do not require training for spill response. APS will immediately notify the County of emergency spill response needs.	As a general note, Arlington County emergency response personnel (Fire Department and Police) receive training on spill response.

In addition to the roles and support outlined above, the County also provides technical assistance to APS for the following activities:

- APS' Chesapeake Bay Total Maximum Daily Load (TMDL) Action Plan
- Construction and maintenance of SWMFs.

The roles and responsibilities outlined in this Agreement shall remain in effect unless modified by mutual agreement or until expiration of APS's current MS4 permit, anticipated to be late 2028/early 2029. Proposed modifications must be submitted in writing and mutually accepted by the County and APS.

By: <u>Michael Woon</u> , COO, Acting For: Greg Emanuel, Director, Arlington County Department of Environmental Services	By: Furtharbu  Reneé Y. Harber, Assistant Superintendent, Facilities and Operations, Arlington Public Schools
Date: July 6, 2023	Date: July 7, 2023

## Appendix D Standard Operating Procedures for Stormwater Facility Inspection and Maintenance

## Appendix D – Standard Operation Procedures for Stormwater Facility Inspection and Maintenance

Arlington Public Schools (APS) conducts annual inspections and maintenance on all its stormwater facilities using an approved stormwater contractor. A list of sites and facilities are reviewed and evaluated at the start of each fiscal year. The contractor is required to schedule inspections and maintenance in a timely fashion and provide a detailed report for each site. The report shall include photos of the facilities during inspection and after maintenance has been completed. Any repair work needed shall be identified in the report so that APS may evaluate and schedule required work. A list of facilities is listed below with procedures for inspection and maintenance.

## **Underground Systems**

- 1. Visually inspect for structural integrity.
- 2. Visually inspect weir wall and low flow orifice.
- 3. Trash rack (if present).
- 4. Test pump (if present).
- 5. Check vaults/pipes for trash and sediment accumulation.
- 6. Include description and photos of maintenance completed.

## **Rain Gardens**

## Overall

- 1. Visually inspect for erosion.
- 2. Inspect inflow points for sediment accumulation.
- 3. Inspect surface for any debris or leaf accumulation.
- 4. Examine ponding depth and adjust accordingly.
- 5. Inspect surface for weeds. Remove if present.
- 6. Include description and photos of maintenance completed.

## Vegetation

- 1. Ensure all plants are healthy. Any those are dead, dying or diseased need to be replaced.
- 2. Visually inspect trees and shrubs and ensure pruning where required.

3. Vegetative species follow the regulations established by APS's local stormwater authority, ACG, as these species thrive in vegetative SMF's and provide year-round benefits. APS follows all maintenance procedures established by the as-built drawings and local VSMP authority regulations.

#### Mulch

1. Maintain mulch layer at a uniform depth of 2-3 inch layer. Rake if necessary.

#### **Bioretention (Planter Boxes)**

#### Overall

- 1. Visually inspect for erosion at inflow and outflow points.
- 2. Inspect inflow points for sediment accumulation.
- 3. Inspect surface for any debris or leaf accumulation.
- 4. Examine ponding depth and adjust accordingly.
- 5. Inspect surface for weeds. Remove if present.
- 6. Include description and photos of maintenance completed.

# Vegetation

- 1. Ensure all plants are healthy. Any those are dead, dying or diseased need to be replaced.
- 2. Visually inspect trees and shrubs and ensure pruning where required.
- 3. Vegetative species follow the regulations established by APS's local stormwater authority, ACG, as these species thrive in vegetative SMF's and provide year-round benefits. APS follows all maintenance procedures established by the as-built drawings and local VSMP authority regulations.

#### Mulch

1. Maintain mulch layer at a uniform depth of 2-3 inch layer. Rake if necessary.

#### Structural

- 1. Visually inspect planter box is structurally sound.
- 2. Visually inspect observation well or overflow pipe to ensure covers are in place.

#### **Permeable Pavements**

#### Overall

- 1. Inspect contributing drainage area for any controllable sources of sediment and erosion.
- 2. Inspect the structural integrity of the pavement surface, looking for signs of surface deterioration, such as slumping, cracking spalling or broken pavers.
- 3. Inspect the surface for evidence of sediment deposition, organic debris, staining or ponding that may indicate surface clogging. Any areas that are clogged need to be vacuumed.

#### Observation Well

- 1. Inspect the condition of the observation well and make sure it is still capped.
- 2. The drawdown rate should be measured at the observation well three (3) days following a storm event in excess of ½ inch in depth. If standing water is found, maintenance is needed. If maintenance is conducted, include description and photos of maintenance completed.

#### Manufactured - Filterra®

- 1. Visually inspect units for standing water.
- 2. Visually inspect unit for structural damage box, grate.
- 3. Visually inspect bypass.
- 4. Clear all waste to include silt/clay build up, cups/bags/trash, leaves and other debris.
- 5. Visually inspect media mixture and adequate media in Filterra© units.
- 6. Replace netting, stones and mulch if needed.
- 7. Visually inspect plants to include height, width, health and any damage to plant. Indicate if plant is replaced.
- 8. Follow all manufacturer maintenance specifications as well as maintenance specifications found in the DEQ BMP Clearinghouse.
- 9. Include description and photos of maintenance completed.

# Manufactured - Stormceptor® and StormFilter®

- 1. Identify Stormceptor® unit (size, model number, location) and date of inspection.
- 2. Follow all manufacturer maintenance specifications as well as maintenance specifications found in the DEQ BMP Clearinghouse.
- 3. Include description and photos of maintenance completed.

#### **Vegetated Roof**

#### Overall

1. Include description and photos of maintenance completed.

#### Structural

- 1. Visually inspect waterproof membrane for cracks and leaks.
- 2. Inspect the roof drains, scuppers and gutter for leaves or debris. Remove if present.

## Vegetation

- 1. Inspect the vegetation for any weeds or leaf accumulation. Remove if present.
- 2. Ensure that all of the plants are healthy. Any that are dead, dying or diseased need to be replaced.
- 3. Vegetative species follow the regulations established by APS's local stormwater authority, ACG, as these species thrive in vegetative SMF's and provide year-round benefits. APS follows all maintenance procedures established by the as-built drawings and local VSMP authority regulations.





# **ARLINGTON PUBLIC SCHOOLS**

PROCUREMENT OFFICE

2110 Washington Blvd., Arlington, VA 22204 • Phone: (703) 228-6123 • Fax: (703) 841-0681

www.apsva.us

June 20, 2023

Via e-mail

# **Apex Companies, LLC**

Attn: Andrea Owen Heller, CHMM Division Manager 9700 Capital Ct. Ste 100 Manassas, VA 20110

Email: andrea.heller@apexcos.com

Subject: Amendment No. 4 to Contract No. 06FY22 - Stormwater Structures Maintenance

Dear Andrea Owen Heller:

On July 21, 2023, the above-cited contract between Apex Companies, LLC and Arlington County School Board, operating as Arlington Public Schools ("APS" or "Owner") shall expire.

In as much as your firm's performance under the present contract is satisfactory, attached is Amendment No. 4 for a one (1) year renewal of the Contract.

The renewal shall be effective July 21, 2023, and shall remain valid through July 20, 2024. This is the second (2nd) of three (3) renewals, with one (1) renewal remaining. All other terms and conditions shall remain unchanged.

Sincerely,

Branden Christian Senior Procurement Specialist

(703) 228-7649

Email: brandon.christian@apsva.us



# **ARLINGTON PUBLIC SCHOOLS**

PROCUREMENT OFFICE

www.apsva.us

Apex Companies, LLC Attn: Andrea Owen Heller, CHMM Division Manager 9700 Capital Ct. Ste 100 Manassas, VA 20110

Email: andrea.heller@apexcos.com

Subject: Amendment No. 4 to Contract No. 06FY22 - Stormwater Structures Maintenance

Dear Andrea Owen Heller:

Contract 06FY22 is hereby renewed effective July 21, 2023, through July 20, 2024, at the existing prices. This Amendment constitutes the second (2nd) of three (3) renewals, with one (1) renewal remaining. All other terms and conditions shall remain unchanged.

# **ACCEPTANCE:**


## ARLINGTON PUBLIC SCHOOLS

Authorized

Signature: David G. Webb

Printed Name David J. Webb, C.P.M. and Title: Procurement Agent

Date: June 21, 2023

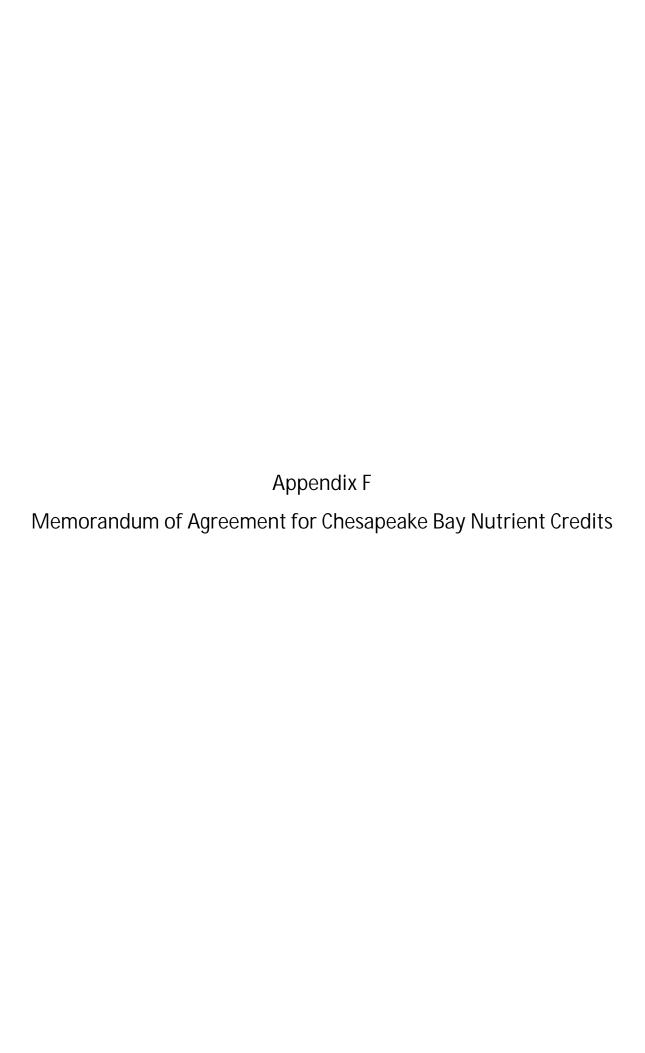

# MEMORANDUM OF AGREEMENT FOR CHESAPEAKE BAY NUTRIENT CREDITS

This Memorandum of Agreement for Chesapeake Bay Nutrient Credits (this "Agreement") is made this 30th day of June 2023, by and between Arlington School Board, a body politic, operating as Arlington Public Schools ("APS") and the Arlington County Board of Arlington County, Virginia ("Arlington"), (each a "Party" and collectively the "Parties').

## **BACKGROUND**

- A. The purpose of this Agreement is to address nutrient reduction requirements for APS' Chesapeake Bay Total Maximum Daily Loads (TMDL) Action Plan under their Phase II (Small) Municipal Separate Storm Sewer Systems (MS4s) Permit No. VAR040127 issued on April 18, 2014 ("APS MS4 Permit").
- B. Pursuant to the above-referenced permit, the Virginia Department of Environmental Quality ("DEQ") has required APS to reduce its discharge of the nutrients total nitrogen ("Nitrogen"), total phosphorus ("Phosphorus"), and total suspended solids ("TSS") from its MS4. APS has determined the need to obtain reductions in the amount of 7 pounds per year phosphorus and 7,644 pounds per year total suspended solids.
- C. In 2005, the State Water Control Board adopted amendments to its Water Quality Management Planning Regulation, 9 VAC 25-720, to establish Nitrogen, Phosphorus, and TSS waste-load allocations for all then-existing significant wastewater treatment plants in the Chesapeake Bay watershed, including Arlington County's Water Pollution Control Plant ("Plant").
- D. Arlington's Plant is subject to the General Virginia Pollutant Discharge Elimination System Watershed Permit Regulation for Total Nitrogen, Total Phosphorus, and Total Suspended Solids Discharges and Nutrient Trading in the Chesapeake Bay Watershed in Virginia, 9 VAC 25-820, issued by the State Water Control Board and DEQ effective January 1, 2022, as hereafter modified or reissued from time to time (the "Watershed General Permit").
- E. Due to exceptional performance and because Arlington's Plant currently discharges less Nitrogen, Phosphorus, and TSS than allowed under Arlington's Nitrogen, Phosphorus, and TSS Credits, Arlington currently has the ability to provide Nitrogen, Phosphorus, and TSS credits on a temporary basis sufficient to meet the reduction requirements applicable to APS Phase II MS4 Permit, VAR040127.

- F. Pursuant to Code of Virginia sections 62.1-44.19: 12 et seq. 9 VAC 25-720- 40 A, and 9 VAC 25-890-40, Section I C 2 b (4), Arlington is authorized to transfer in its discretion, and APS is authorized to acquire, a portion of Arlington's Nitrogen, Phosphorous, and TSS credits to satisfy APS' reduction obligation under the Phase II MS4 Permit, VAR040127.
- G. Based on Arlington's exceptional Nitrogen, Phosphorous, and TSS treatment, Arlington County's Department of Environmental Services recommended Arlington to APS as a potential source of Nitrogen, Phosphorous, and TSS credits. Accordingly, in April 2022, APS requested Arlington to provide Phosphorus credits in the amount of 7 pounds Phosphorus per year and TSS credits in the amount of 7,644 pounds per year for a five-year period.
- H. DEQ confirmed that Arlington would retain its full waste load allocations for Nitrogen and Phosphorous, and permitted TSS discharge limit, and DEQ expressed its appreciation for Arlington's leadership and partnership in the Chesapeake Bay cleanup program.
- I. Pursuant to a July 18, 2015, Arlington County Board meeting, the Arlington County Board authorized the Arlington County Manager to execute agreements of this nature without the need to return to the Arlington County Board.

# **AGREEMENT**

In consideration of the mutual covenant and conditions herein, and for good and valuable consideration, the receipt and sufficiency of which the Parties hereby acknowledge, the Parties hereby acknowledge, the Parties agree as follow:

1. Temporary Credits. Beginning from June 30, 2023, and for each Arlington compliance year starting January 1, 2024, thereafter through and including APS compliance year 2028 (ending June 30, 2028), Arlington hereby agrees to generate and transfer Nitrogen, Phosphorous, and TSS credits to APS, and APS hereby accepts, credits in the amount of 7 pounds per year of Phosphorus and 7,644 pounds per year of TSS (the "Credits"). Arlington shall have no obligation to extend the availability of the Credits beyond compliance year 2028 but may elect to do so in its discretion following a request for such an extension from APS. Any such extension shall be in writing as an amendment to this Agreement pursuant to Paragraph 17 below. Notwithstanding the other provisions of this Paragraph 1, this Agreement and the Credits transfer are expressly contingent upon the continued ability of Arlington to provide the Credits under actual operating conditions and current laws and regulations including without limitation Arlington's Nitrogen, Phosphorous, and TSS waste load allocation. If, by any order, law, regulation, local legal obligations or requirements, facility operating conditions, or any changes thereto such ability were to cease, Arlington's obligation to provide the Credits shall cease and this

Agreement may be renegotiated by the parties.

- 2. <u>Credit Price and Payment.</u> The price for the Credits under this Agreement is \$23.61 per pound per year for Phosphorus and \$1.00 per pound per year for TSS for a total annual cost of \$7,809.27. With issuance of an invoice by Arlington, APS shall pay such annual amount by each June 30<sup>th</sup> at the end of the APS compliance year. Payments shall be in the form of a check made payable to "Arlington County Treasurer" and delivered to Arlington County at the following address ATTN: Utility Fund Manager, 2100 Clarendon Blvd, Suite 900, Arlington, VA 22201.
- 3. <u>Limitation on Use of Credits.</u> APS agrees that its sole and limited use of the Credits shall be to offset Nitrogen, Phosphorus, and TSS discharges from APS Facilities under the Phase II MS4 General Permit and that it shall not transfer any portion of the Credits to any other person or entity. In the event that APS does not need all of the Credits for compliance with the Phase II MS4 General Permit for any compliance year, APS shall transfer such Nitrogen, Phosphorus, and TSS credits, up to 7 pounds Phosphorus per year and 7,644 pounds TSS per year, to Arlington for Arlington's use or exchange for that compliance year. Any such credit transfer shall be without cost to Arlington for that compliance year, but the parties may reexamine and adjust the Credit Price set forth in Paragraph 2 above in the subsequent year.
- 4. <u>APS' Phase II MS4 Permit Registration</u>. By October 1, 2023, APS shall file a registration statement for APS with DEQ under the provisions of the NPDES MS4 Phase II General Permit. Any TMDL action plan submitted by APS to DEQ shall be consistent with the provisions of this Agreement, including but not limited to the temporary nature of the Credits.
- 5. Arlington's Compliance Plan Modification. Arlington is a member of the Nutrient Exchange or a participant in its Exchange Compliance Plan. On an annual basis, Arlington's Compliance Plan shall be reviewed by Arlington to ensure that adequate credits have been held in reserve for the purposes of trading with APS. If adequate credits have not been set aside, subject to Paragraph I above Arlington shall (a) modify such plan with respect to the Arlington Nitrogen, Phosphorus, and TSS Credits to make appropriate revisions consistent with the temporary Credits provided under this Agreement and (b) submit such modification to DEQ for approval.
- 6. <u>Regulatory Approval.</u> Arlington shall bear no responsibility for the failure of DEQ to approve Arlington's Compliance Plan as modified in the manner contemplated by this Agreement or for any other permits or approvals necessary for the accomplishment or completion of the Credits transfer under this Agreement.
- 7. <u>Mutual Cooperation.</u> Subject to Paragraph 6, the Parties shall continue to cooperate with each other as reasonably necessary to confirm or bring about the transfer of the credits to

APS as provided herein.

- 8. <u>DEQ Credit Exchange Notification:</u> Both Parties are required to certify that credits have been transferred between their two facilities by completing the DEQ Credit Exchange Notification Form (Attachment A) and submitting the executed form to DEQ by each June 1.
- 9. <u>Term.</u> This Agreement shall be in effect on June 30, 2023, and shall expire on June 30, 2028. Notwithstanding the preceding sentence, if either Party fails to perform a material obligation hereunder and fails to cure such failure to perform within sixty (60) days of written notice from the non-faulting Party, the non-defaulting Party may terminate this Agreement upon written notice to the other Party.
- 10. <u>Authorization</u>. Each Party represents that its execution, delivery, and performance under this Agreement have been duly authorized by all necessary action on its behalf, and do not and will not violate any provision of its charter or other governing legal requirements, or result in a material breach of or constitute a material default under any agreement, indenture or instrument of which it is a party or by which it or its properties may be bound or affected. To each Party's knowledge there are no actions, suits, or proceedings, pending or threatened against such Party or any of its properties, before any court or governmental authority that, if determined adversely to such Party, would have a material adverse effect on the transactions contemplated by this Agreement.
- 11. No Third Party Beneficiaries. This Agreement is solely for the benefit of the Parties hereto and their permitted successors and assignees and shall not confer any rights or benefits on any other person.
- 12. <u>No Assignment.</u> This Agreement, and the rights and obligations hereunder, shall inure to the benefit of and shall be binding upon any successors of such Parties. APS may not transfer or assign this Agreement, or its rights or obligations hereunder, without the prior written consent of Arlington, which consent may be withheld in Arlington's discretion.
- 13. <u>Brokerage Commissions.</u> The Parties represent and warrant to each other that they have not dealt with any business broker or agent who would be entitled to a brokerage commission or finder's fees as a result of this Agreement or any related transactions. Each Party agrees, to the extent permitted under law and without waiving sovereign immunity, to indemnify and hold the other harmless from any and all claims for commissions of brokers or finder's fees claimed by, through or under the indemnifying Party, including any direct losses related to any such claim.
- 14. <u>Notices.</u> All notices, request, demands, claims and other communications hereunder shall be in writing, shall be delivered in person or by mail (first class, postage pre- paid) or

overnight delivery, and shall be deemed given when delivered in person or, if not delivered in person, when received (or delivery is refused) by the Party to whom such notice, request, demand, claim or other communication is directed, at the following address, or at such other address as a Party shall designate by written notice to the other Party.

If to Arlington Public Schools:

Arlington Public Schools ATTN: Superintendent 2110 Washington Blvd, 4th Floor Arlington, VA 22204

With a copy to:

Arlington Public Schools
Office of Procurement
2100 Washington Blvd, 4th Floor
Arlington, VA 22204

And:

Arlington Public Schools Facilities and Operations
ATTN: Assistant Superintendent, Facilities and Operations
2770 S. Taylor Street
Arlington, VA 22206

If to Arlington:

Arlington County ATTN: County Manager 2100 Clarendon Blvd, Suite 300 Arlington, VA 2220 I

With a copy by first class mail to:

Arlington County ATTN: County Attorney 2100 Clarendon Blvd, Suite 403 Arlington VA 2220 I

And:

Arlington County Water Pollution Control Bureau
ATTN: Bureau Chief
3402 S Glebe Rd
Arlington, VA 22202

- 15. Governing Law; Venue; Severability. This Agreement shall be construed in accordance with and governed for all purposes by the laws of the Commonwealth of Virginia. In the event of any dispute concerning this Agreement that the Parties are unable to settle informally, exclusive venue for any legal action shall be the Commonwealth of Virginia. If any word or provision of this Agreement as applied to any Party or to any circumstance is adjudged by a court to be invalid or unenforceable, the same shall in no way affect any other circumstance or the validity or enforceability of any other word or provision.
- 16. No Waiver. Neither any failure to exercise or any delay in exercising any right, power or privilege under this Agreement by either Party shall operate as a waiver, nor shall any single or partial exercise of any right, power or privilege hereunder preclude the exercise of any other right, power, or privilege. No waiver of any breach of any provision shall be deemed to be a waiver of any preceding or succeeding breach of the same or any other provision, nor shall any waive be implied from any course of dealing.
- 17. Entire Agreement: Amendments. This Agreement contains the entire Agreement between the Parties as to the subject matter hereof and supersedes all previous written and oral negotiations, commitments, proposals, and writings. No amendments may be made to this Agreement except by a writing signed by both Parties.
- 18. <u>Appropriations</u>. All of APS's duties and obligations under this Agreement are subject to appropriation of funds by the School Board of Arlington County, Virginia, for the specific purpose of satisfying the payment and performance of such obligations. If such funds are not appropriated or if the actions called for in this Agreement are not substantially completed for any reason within three (3) months of this Agreement, APS may terminate this Agreement upon not less than thirty (30) days prior written notice. If such funds are appropriated before the expiration of such thirty (30) day period, this Agreement shall remain in effect.
- 19. No Waiver of Sovereign Immunity. Nothing in this Agreement, nor any action taken by any of the parties pursuant to this Agreement, nor any document or documents that arise out of this Agreement, shall constitute or be construed as a waiver of the sovereign immunity of either party, including their elected and appointed officials, officers, and employees.
- 20. <u>Counterparts.</u> This Agreement may be executed in one or more counterparts, each of which shall be deemed an original, but all of which together shall constitute one and the same instrument.

IN WITNESS WHEREOF, the Parties hereto have caused the execution of this Agreement.

ARLINGTON PUBLIC SCHOOLS

Dr. Francisco Durán Superintendent

ARLINGTON COUNTY
DEPARTMENT OF ENVIRONMENTAL SERVICES

By: DocuSigned by:

Mark / Aulf

3B97A255DD9741E

Mark Schwartz
County Manager

Approved as to Form:

By:

MinhChau Con

E04AAGFGG4EA400...

Name:

6/14/2023

Title:

Attachment A - Nutrient Credit Acquisition Form

Attachment B – Sediment Credit Acquisition Form

# MS4 Nutrient Credit Acquisition Form

Pursuant to Code of Virginia sections § 62.1-44.19:21.A and Part II.A.10 of the General VPDES Permit for Discharges of Stormwater from Small Municipal Separate Storm Sewer Systems, the below named Permittees hereby certify that credits have been transferred between their two facilities as outlined below in full or partial satisfaction of compliance obligations:

Facility generating credits: Arlington County Water Pollution Control Plant

VAN 010021

Facility Name

Registration No.

Facility acquiring credits: Arlington Public Schools

VAR <u>040127</u>

Facility Name

Registration No.

Credits Transferred

Compliance Year:

2023

Delivered Total Nitrogen Credits:

0 lbs

Delivered Total Phosphorus Credits:

7 lbs

I certify under penalty of law that this notification and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine or imprisonment for knowing violations.

Facility generating credits:

Principal Executive Officer or Authorized Agent:

Facility acquiring credits:

Principal Executive Officer or Authorized Agent:

Mark J. Schwartz

Typed or Printed Name

Docusigned by:

Signature

703-228-3120

Area Code/Phone Number

6/14/2023

Date

Dr. Francisco Durán

Type or Printed Name

Signature

703-228-8634

Area Code/Phone Number

06/01/23

Date

# MS4 Sediment Credit Acquisition Form

Pursuant to Code of Virginia sections § 62.1-44.19:21.1 and Part II.A.10 of the General VPDES Permit for Discharges of Stormwater from Small Municipal Separate Storm Sewer Systems, the below named Permittees hereby certify that credits have been transferred between their two facilities as outlined below in full or partial satisfaction of compliance obligations:

Facility generating credits: Arlington County Water Pollution Control Plant

VA 010021 Permit No.

Facility Name

Facility acquiring credits: Arlington Public Schools

VAR 040127

Facility Name

Registration No.

**Credits Transferred** 

Compliance Year:

2023

**Delivered Total Sediment Credits:** 

7,644 lbs

I certify under penalty of law that this notification and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine or imprisonment for knowing violations.

Facility generating credits:	Facility acquiring credits:
Principal Executive Officer or Authorized Agent:	Principal Executive Officer or Authorized Agent:
Mark J. Schwartz	Dr. Francisco Durán
Typed or Printed Name	Type or Printed Name
DocuSigned by:  Mark / Now 3	
Signatupe9741F	Signature
703-228-3120	703-228-8634
Area Code/Phone Number	Area Code/Phone Number
6/14/2023	06/01/23
Date	Dota

# Appendix G APS Program Plan Reference Documents

# Appendix G – APS Program Plan Reference Documents

# **APS Program Plan Reference Documents**

- Memorandum for Agreement Roles and Responsibilities of Arlington County and Arlington Public Schools for MS4 Permit Compliance (June 2023)
- Notification of Physical Interconnection with ACG (August 14, 2015)
- Notification of Potential known interconnection between VDOT's stormwater systems and APS' stormwater systems (April 24, 2015).
- County Code Chapter 26-7c (January 22, 2022)
- Arlington Public Schools Illicit Discharge Detection and Elimination Program Plan (August 2019)
- ACG Plan Review Procedures (September 2021)
- Chesapeake Bay Preservation Ordinance (July 2018, to be updated 2024-2025)
- ACG Guidelines for Inspection and Maintenance of Stormwater Facilities (Website 2024)
- Erosion and Sediment Control Ordinance (July 2018)
- Stormwater Management Ordinance (June 2014)
- APS's Standard Operation Procedures for Stormwater Facility Inspection and Maintenance (October 2022)
- APS contract with a third party for inspection (June 20, 2023)
- E-3.30 PIP-1 Housekeeping and Grounds Keeping (June 3, 2019)
- *E-3.30 PIP-2 Trash and Recycling* (June 3, 2019)
- E-3.30 PIP-3 Occupational Health (July 11, 2019)
- E-3.31 PIP-7 Environmental Compliance (July 11, 2019)
- Trades Center SWPPP (May 2022)
- Nutrient Management Plans (see most recent annual report)
- Chesapeake Bay TMDL Action Plan (August 2023)